

SUBMERSIBLE HOUSEHOLD DRAINAGE PUMPS

MINI P

The **MINI P** submersible pump for clean water is suitable for domestic drainage applications, as well as many other small operations such as emptying of tanks, aquariums, swimming pools, etc. It is supplied with a 10 meter electrical cable with a “Shuko” plug.



APPLICATIONS

- Drainage of rainwater
- Drainage of floodwater
- Transfer of water from tanks
- Small garden irrigation
- Small fountains and water features

CONSTRUCTION MATERIALS



- Pump body: PPE+30%
Fibreglas
- Impeller: Noryl
- Shaft: AISI 420F Stainless steel
- Seal: Mechanical

WORKING LIMITS

- Maximum flow rate: 7,8 m³/h
- Maximum head: 8,2 mca
- Maximum passage of solids: clean water
- Maximum liquid temperature: +40°C
- Maximum immersion: 3 m

MOTOR SPECIFICATIONS

- Voltage: 1x230V
- Insulation class: B
- Protection class: IP68
- Rotation: 2900 r.p.m.
- Protection and control: Includes permanent condenser, thermal overcurrent protection and level switch

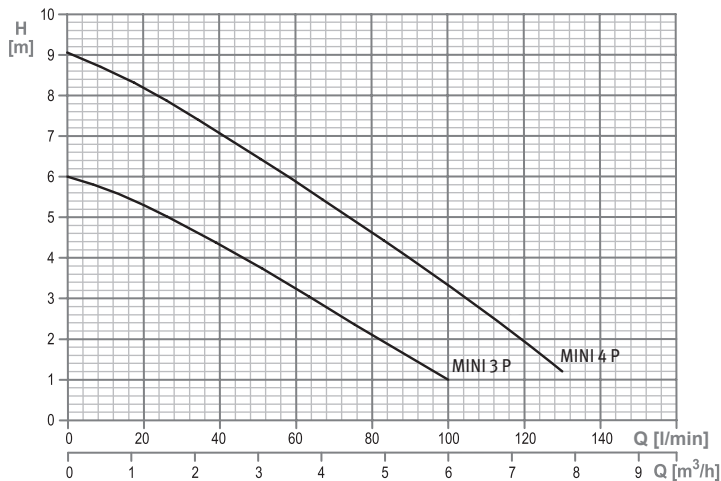

MODEL	POWER (kW)	ABSORVED CURRENT (A)	CAPACITOR (µF)	DIMENSIONS (mm)				WEIGHT (Kg)
				DN	A	B	C	
MINI 3 P	0,15	1,4	6,3	G1 ¼	300	400	190	4,6
MINI 4 P	0,37	2,3	8	G1 ¼	300	400	190	5,8